

# Dribond Crystal Sealer

## WATERPROOFING COMPOUND

### PACKAGING



### MIXING



### APPLICATION




### USES



### SUBSTRATES

CONCRETE  
CEMENT BLOCK  
CEMENT RENDER

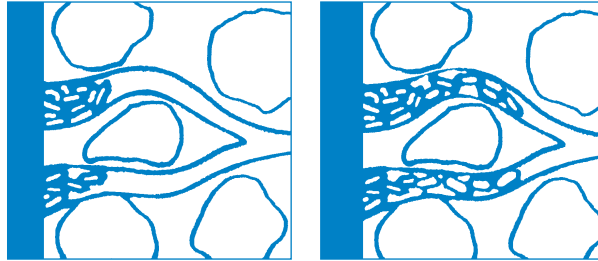

Crystals grow in the capillaries of cement based surface in damp conditions by 1cm/week up to a depth of 0.4 metres.

### DESCRIPTION

A cement based waterproofing compound that chemically reacts with moist cement based substrates. Crystal Sealer forms insoluble crystals in the capillary tracts of the substrate permanently waterproofing the surface yet still allowing the surface to breathe.

### USES

Waterproofing of cement based surfaces, i.e., cement block, cement render and concrete floors. Walls and floors of domestic, commercial and civil constructions, foundation walls, structural floors and walls of industrial buildings, concrete block walls in warehouses and domestic constructions, swimming pools, storage tanks, tunnels and dams, waterproof barrier between base floor slabs and concrete toppings.

### FEATURES

- Crystal Sealer penetrates into and becomes a permanent integral part of the surface, therefore it can not peel or blister off as do normal coatings.
- Crystal Sealer will not tear or puncture and does not have to be protected from back fill.
- Crystal Sealer being a cement based material has an expansion and contraction the same as the cement surface to which it is applied.

### COVERAGE (Approximate)

0.8-1.1 kg per m<sup>2</sup>/coat (2 coats required)

### PERFORMANCE DATA

Withstands over 100 metre water head.

Resists harsh chemicals e.g. chlorine, ethylene glycol, unleaded petrol and diesel oil.

**Protects** – reinforcing bars from corrosion.

**Strength** – Increases concrete strength by up to 20%.

### SPECIFICATION

The waterproofing compound shall be a cement based compound that seals cement based surfaces by crystalization and can withstand up to a 100 metre head of water such as Crystal Sealer manufactured by Construction Chemicals and shall be applied strictly in accordance with the manufacturers instructions.

## **SURFACE PREPARATION**

Apply to portland cement based surfaces that are free from dirt, dust, grease, oil, efflorescence and other contaminants.

Clean out and patch cracks larger than 0.25 mm thick. Mechanically roughen smooth surfaces.

Use caustic soda solution to clean grease and oil contaminated surfaces then thoroughly hose down to completely remove contamination. Badly contaminated areas may require sand blasting to provide a positive key. Gloves and eye protection must be used when using acids and cleaning agents. Hose down thoroughly the surface to be coated. Concrete three days old will only require surface wetting.

## **MIXING**

Mix only the amount that can be applied in 10-15 minutes.

Mix 5 kg with 1-1.5 litres of water and mix to a thick paste. Mix thoroughly and add water to bring the mixture to the desired consistency. The final powder water ratio will be approximately 5 kg powder – 2 litres of water. Note the final powder water ratio so that future batches can be made the same.

Discard unused material after 20 minutes and do not add additional water after the second mix.

## **APPLICATION**

Crystal Sealer must only be applied to green or wet cement based substrates. Apply with a stiff brush or broom working the mixture well into the voids.

To prevent segregation and ensure a uniform mixture stir the crystal sealer solution frequently during the application and dip brush deep into the mixture so that a thick coat can be applied.

Apply a second coat while the first is still green or tacky.

## **SET TIME**

20-30 minutes depending on temperature. Back fill 24 hours after application.

## **CURING**

Protect the surface from rain or frost until it has cured. Water cure the treated surface by mist spraying with water 3-4 times daily for 3 days to hasten crystal growth.

## **PRECAUTION**

Crystal Sealer is alkaline so gloves must be worn. Wash splashes immediately off skin and eyes with clean water.

## **FEATURES**

Crystals can grow up to 0.4 metres into the concrete in the presence of water. Crystals grow approx. 1 cm depth/week.

## **SHELF LIFE**

12 months.



● **ADELAIDE** 467 - 469 SOUTH RD REGENCY PARK 5010 PH: (08) 8346 8013 FAX: (08) 8340 2052  
● **BRISBANE** 45 COULSON ST WACOL 4076 PH: (07) 3271 2944 FAX: (07) 3271 3892  
● **MELBOURNE** 1 / 10 GABRIELLE CT BAYSWATER NORTH 3153 PH: (03) 9761 4711 FAX: (03) 9761 4748  
● **PERTH** 61 DOWD ST WELSHPOOL 6106 PH: (08) 9358 6493 FAX: (08) 9358 6493  
● **SYDNEY** 2/ 31-33 NEWTON RD WETHERILL PARK 2164 PH: (02) 9756 3533 FAX: (02) 9756 3534  
● **AUCKLAND** 16 CARPENTER RD EAST TAMAKI PH: (09) 273 5444 FAX: 0800 266 236  
● **KUALA LUMPUR** LOT 2 JALAN KECAPI 33/2 ELITE INDUSTRIAL ESTATE OFF JALAN BUKIT KEMUNING  
PH: (03) 552 2522 FAX: (03) 522 2526